


1/2 inch 差し込み角 6角ソケット (mmサイズ・ディープソケット)

対辺寸法W mm	パーツナンバー	D	d	L	t	T	重量
		mm	mm	mm	mm	mm	kg
8	L00008MM	14.5	25	82	5	66	0.2
9	L00009MM	16	25	82	5	66	0.2
10	L00010MM	17	25	82	7	64	0.13
11	L00011MM	18.5	25	82	7	64	0.15
12	L00012MM	19.7	25	82	8	64	0.16
13	L00013MM	21	25	82	8	64	0.17
14	L00014MM	22.5	25	82	10	64	0.19
15	L00015MM	23.5	30	82	10	64	0.24
16	L00016MM	24.5	30	82	10	64	0.22
17	L00017MM	26	30	82	10	64	0.24
18	L00018MM	27.5	30	82	11	64	0.26
19	L00019MM	29	30	82	11	64	0.28
20	L00020MM	30	30	82	12	64	0.31
21	L00021MM	31	30	82	12	64	0.31
22	L00022MM	32.5	30	82	12	63	0.3
23	L00023MM	33.5	30	82	13	63	0.33
24	L00024MM	35	30	82	14	63	0.35
25	L00025MM	37	30	82	14	64	0.35
26	L00026MM	38	30	82	15	63	0.43
27	L00027MM	38.5	30	82	16	63	0.43
28	L00028MM	40	30	82	16	63	0.45
29	L00029MM	41	30	82	17	62	0.46
30	L00030MM	42.5	30	82	17	63	0.48
31	L00031MM	44	40	82	17	62	0.56
32	L00032MM	45	40	82	19	60	0.55
33	L00033MM	46.5	40	82	19	62	0.56
34	L00034MM	47	40	82	20	61	0.59
35	L00035MM	49	40	82	20	61	0.64
36	L00036MM	50	40	82	20	61	0.64
38	L00038MM	52	40	82	21	60	0.66
41	L00041MM	57	40	82	23	60	0.84
46	L00046MM	63	40	82	25	59	0.84

※ナット対辺mmサイズソケット

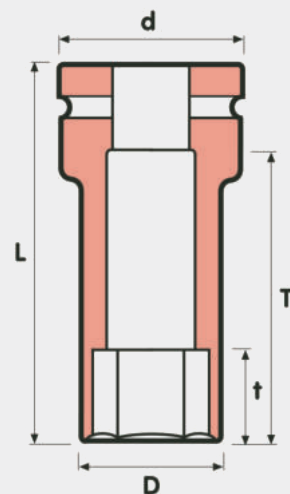


各部寸法

- d: 駆動端の直径
- D: ソケット先端の直径
- L: 全長
- t: ソケット開口部の深さ
- T: ボルトクリアランス深さ
- w: 対応ナット対辺

1/2 inch 差し込み角 6角ソケット (inch サイズ・ディープソケット)

対辺寸法W inch	パーツナンバー	D	d	L	t	T	重量
		mm	mm	mm	mm	mm	kg
3/8	L00004	17	25	82	7	64	0.13
7/16	L00007	18.5	25	82	7	64	0.15
1/2	L00008	21	25	82	8	64	0.17
9/16	L00009	22.5	25	82	10	64	0.19
5/8	L00010	24.5	30	82	10	64	0.22
11/16	L00011	26	30	82	10	64	0.24
3/4	L00012	29	30	82	11	64	0.28
13/16	L00013	31	30	82	12	64	0.31
7/8	L00014	32.5	30	82	12	63	0.31
15/16	L00015	35	30	82	14	63	0.35
1	L00100	37	30	82	14	63	0.37
1 1/16	L00101	38.5	30	82	16	62	0.43
1 1/8	L00102	41	30	82	17	62	0.45
1 3/16	L00103	42.5	30	82	17	62	0.48
1 1/4	L00104	45	40	82	19	62	0.51
1 5/16	L00105	46.5	40	82	19	62	0.59

※ナット対辺inchサイズソケット

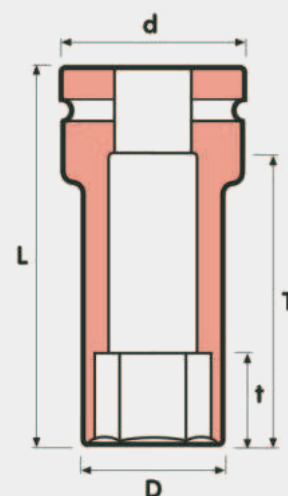


各部寸法

- d: 駆動端の直径
- D: ソケット先端の直径
- L: 全長
- t: ソケット開口部の深さ
- T: ボルトクリアランス深さ
- w: 対応ナット対辺

3/4 inch 差し込み角6角ソケット (mmサイズ・ディープソケット)

対辺寸法W mm	パーツナンバー	D	d	L	t	T	重量
		mm	mm	mm	mm	mm	kg
12	L10012MM	25	44	100	8	76	0.65
13	L10013MM	25	44	100	8	76	0.65
14	L10014MM	27	44	100	10	76	0.37
15	L10015MM	27	44	100	10	76	0.56
16	L10016MM	28	44	100	10	74	0.52
17	L10017MM	31	44	100	10	74	0.6
18	L10018MM	32	44	100	11	74	0.64
19	L10019MM	33	44	100	11	74	0.61
20	L10020MM	34	44	100	12	74	0.65
21	L10021MM	36	44	100	12	74	0.70
22	L10022MM	36	44	100	12	74	0.7
23	L10023MM	39	44	100	13	74	0.72
24	L10024MM	39.5	44	100	14	74	0.72
25	L10025MM	40	44	100	14	75	0.57
26	L10026MM	42	44	100	15	74	0.73
27	L10027MM	43	44	100	16	74	0.75
28	L10028MM	44	44	100	16	74	0.77
29	L10029MM	44	44	100	17	74	0.73
30	L10030MM	46	44	100	17	74	0.83
31	L10031MM	47	44	100	17	74	0.84
32	L10032MM	48.5	44	100	19	74	0.89
33	L10033MM	51	44	100	19	74	0.99
34	L10034MM	52	44	100	20	74	1.00
35	L10035MM	53	44	100	20	74	1.00
36	L10036MM	54	44	100	20	74	1.04
37	L10037MM	56	44	100	21	74	1.12
38	L10038MM	57	44	100	21	72	1.18
40	L10040MM	59	44	100	22	72	1.28
41	L10041MM	61	44	100	23	72	1.27
42	L10042MM	62	44	100	23	72	1.23
43	L10043MM	64	44	100	24	72	1.35
44	L10044MM	65	44	100	24	71	1.35
45	L10045MM	66	44	100	25	71	1.35
46	L10046MM	67	44	100	25	72	1.5
47	L10047MM	68.5	44	100	26	76	1.46
48	L10048MM	69	44	100	26	76	1.61
50	L10050MM	70	44	100	28	72	1.34
51	L10051MM	71	44	100	30	76	1.4
52	L10052MM	72	44	100	30	76	1.84
55	L10055MM	76	44	100	30	72	1.53
56	L10056MM	78	44	100	30	76	1.65
60	L10060MM	83	44	125	35	98	2.27
65	L10065MM	88	44	125	35	96	2.39
70	L10070MM	95	44	125	40	95	2.77
75	L10075MM	100	44	125	40	93	2.93
95	L10095MM	124	44	125	40	88	4.07

※ナット対辺mmサイズソケット

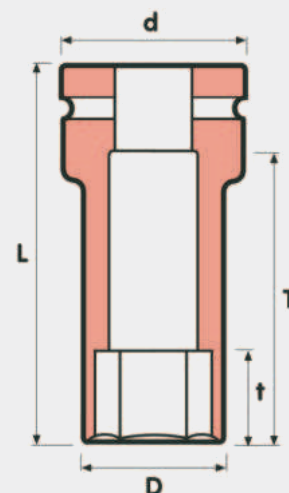


各部寸法

- d: 駆動端の直径
- D: ソケット先端の直径
- L: 全長
- t: ソケット開口部の深さ
- T: ボルトクリアランス深さ
- w: 対応ナット対辺

3/4 inch 差し込み角 6角ソケット (inchサイズ・ディープソケット)

対辺寸法W inch	パーツナンバー	D	d	L	t	T	重量
		mm	mm	mm	mm	mm	kg
5/8	L10010	28	44	100	10	74	0.63
11/16	L10011	31	44	100	10	74	0.6
3/4	L10012	33	44	100	11	74	0.61
13/16	L10013	36	44	100	12	74	0.68
7/8	L10014	36	44	100	12	74	0.7
15/16	L10015	39.5	44	100	14	74	0.72
1	L10100	40	44	100	14	74	0.68
1 1/16	L10101	43	44	100	16	74	0.75
1 1/8	L10102	44	44	100	16	74	0.77
1 3/16	L10103	46	44	100	17	74	0.83
1 1/4	L10104	48.5	44	100	19	74	0.85
1 5/16	L10105	51	44	100	19	74	1.00
1 3/8	L10106	53	44	100	20	74	1.00
1 7/16	L10107	56	44	100	21	74	1.12
1 1/2	L10108	57	44	100	21	72	1.18
1 9/16	L10109	59	44	100	22	72	1.22
1 5/8	L10110	61	44	100	23	72	1.27
1 11/16	L10111	64	44	100	24	72	1.35
1 3/4	L10112	65	44	100	24	71	1.51
1 13/16	L10113	67	44	100	25	72	1.5
1 7/8	L10114	69	44	100	26	72	1.5
2	L10200	71	44	100	30	72	1.39
2 9/16	L10209	88	44	125	35	96	2.39
2 3/4	L10212	95	44	125	40	95	2.77
3 3/4	L10312	124	44	125	40	88	4.07

※ナット対辺inchサイズソケット

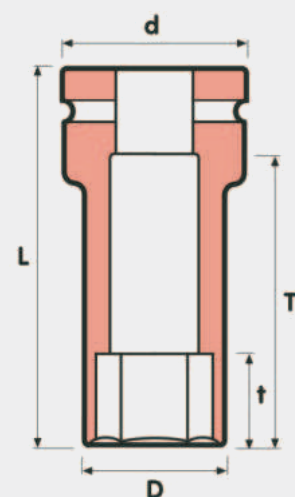


各部寸法

- d: 駆動端の直径
- D: ソケット先端の直径
- L: 全長
- t: ソケット開口部の深さ
- T: ボルトクリアランス深さ
- w: 対応ナット対辺

1 inch 差し込み角 6角ソケット (mmサイズ・ディープソケット)

対辺寸法W mm	パーツナンバー	D	d	L	t	T	重量
		mm	mm	mm	mm	mm	kg
19	L20019MM	35	54	100	11	71	1.30
21	L20021MM	36	54	100	12	71	1.31
22	L20022MM	37	54	100	12	71	0.88
23	L20023MM	38	54	100	14	68	0.88
24	L20024MM	38	54	100	14	68	0.89
25	L20025MM	41	54	100	14	71	1.29
26	L20026MM	43	54	100	15	71	0.99
27	L20027MM	44	54	100	16	68	0.99
28	L20028MM	47	54	100	16	68	1.07
29	L20029MM	47	54	100	17	71	1.03
30	L20030MM	50	54	100	17	68	1.15
31	L20031MM	50	54	100	17	71	1.20
32	L20032MM	52	54	100	19	68	1.17
35	L20035MM	57	54	100	20	68	1.25
36	L20036MM	57	54	100	20	68	1.18
37	L20037MM	58	54	100	21	68	1.26
38	L20038MM	59	54	100	21	67	1.32
39	L20039MM	59	54	100	22	69	1.3
40	L20040MM	61	54	100	22	69	1.33
41	L20041MM	63	54	100	23	67	1.41
42	L20042MM	64	54	100	23	67	1.44
43	L20043MM	64	54	100	24	67	1.46
44	L20044MM	67	54	115	24	83	1.97
45	L20045MM	68	54	115	25	83	1.98
46	L20046MM	69	54	115	25	82	1.85
47	L20047MM	71	54	115	26	83	1.93
48	L20048MM	72	54	115	26	86	1.94
49	L20049MM	73	54	115	28	86	1.16
50	L20050MM	75	54	125	28	93	2.22
51	L20051MM	76	54	125	30	96	2.26
52	L20052MM	78	54	125	30	93	2.38
55	L20055MM	81	62	125	30	93	2.67
56	L20056MM	82	62	125	30	93	2.80
57	L20057MM	85	62	125	30	96	2.80
60	L20060MM	87	62	125	33	93	2.90
65	L20065MM	94	62	135	35	105	3.63
70	L20070MM	100	62	135	38	105	3.83
75	L20075MM	107	76	135	38	105	4.80
80	L20080MM	113	76	140	38	108	5.15
85	L20085MM	117	76	140	38	100	5.90
90	L20090MM	124	76	140	45	99	5.74
95	L20095MM	129	76	140	45	98	5.83

※ナット対辺mmサイズソケット

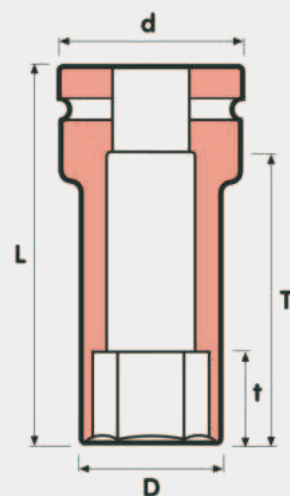


各部寸法

- d: 駆動端の直径
- D: ソケット先端の直径
- L: 全長
- t: ソケット開口部の深さ
- T: ボルトクリアランス深さ
- w: 対応ナット対辺

1 inch 差し込み角 6角ソケット(inchサイズ・ディープソケット)

対辺寸法W inch	パーツナンバー	D	d	L	t	T	重量
		mm	mm	mm	mm	mm	kg
3/4	L20012	35	54	100	11	71	1.3
13/16	L20013	37	54	100	12	71	0.86
7/8	L20014	38	54	100	12	71	0.87
15/16	L20015	39	54	100	14	68	0.89
1	L20100	42	54	100	14	68	0.93
1 1/16	L20101	44	54	100	16	68	0.99
1 1/8	L20102	48	54	100	24	68	1.07
1 3/16	L20103	50	54	100	17	68	1.15
1 1/4	L20104	53	54	100	19	68	1.17
1 5/16	L20105	54	54	100	19	68	1.19
1 3/8	L20106	57	54	100	20	68	1.25
1 7/16	L20107	58	54	100	21	68	1.31
1 1/2	L20108	59	54	100	21	68	1.32
1 9/16	L20109	61	54	100	22	67	1.38
1 5/8	L20110	63	54	100	23	67	1.41
1 11/16	L20111	64	54	100	24	67	1.46
1 3/4	L20112	67	54	115	24	82	1.85
1 13/16	L20113	69	54	115	25	82	1.85
1 7/8	L20114	72	54	115	26	82	2.00
1 15/16	L20115	73	54	115	28	82	2.1
2	L20200	76	54	125	30	93	2.3
2 1/16	L20201	78	54	125	30	93	2.4
2 1/8	L20202	80	62	125	30	93	2.6
2 3/16	L20203	82	62	125	30	93	2.8
2 1/4	L20204	85	62	125	30	93	2.8
2 5/16	L20205	86	62	125	30	93	2.9
2 3/8	L20206	87	62	125	33	93	2.9
2 7/16	L20207	91	62	135	35	107	3.3
2 1/2	L20208	92	62	135	35	107	3.55
2 9/16	L20209	94	62	135	35	107	3.63
2 5/8	L20210	96	62	135	38	107	3.7
2 11/16	L20211	99	62	135	38	107	3.80
2 3/4	L20212	100	62	135	38	107	3.83
2 13/16	L20213	102	76	135	38	100	4.25
2 7/8	L20214	104	76	135	38	99	4.42
2 15/16	L20215	107	76	135	38	99	4.62
3	L20300	108	76	135	38	98	4.82
3 1/16	L20301	109	76	135	38	98	4.71
3 1/8	L20302	113	76	140	38	102	5.3
3 1/4	L20304	115	76	140	35	101	5.31
3 3/4	L20312	129	76	140	45	98	5.83
3 7/8	L20314	134	76	140	45	97	6.40

※ナット対辺inchサイズソケット

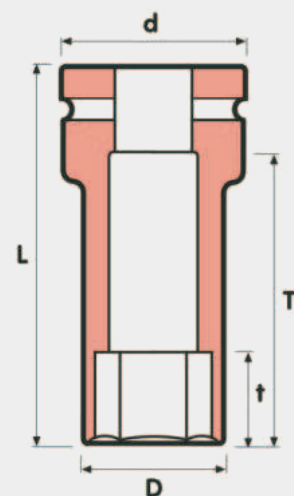


各部寸法

- d: 駆動端の直径
- D: ソケット先端の直径
- L: 全長
- t: ソケット開口部の深さ
- T: ボルトクリアランス深さ
- w: 対応ナット対辺

1-1/2 inch 差し込み角 6角ソケット (mmサイズ・ディーブソケット)

対辺寸法W mm	パーツナンバー	D	d	L	t	T	重量
		mm	mm	mm	mm	mm	kg
30	L80030MM	56	84	150	17	108	3.30
35	L80035MM	61	84	150	20	108	3.79
36	L80036MM	63	84	150	23	108	3.81
38	L80038MM	65	84	150	24	108	3.86
41	L80041MM	70	84	150	27	106	3.70
42	L80042MM	71	84	150	27	106	3.70
43	L80043MM	73	84	150	27	106	3.90
46	L80046MM	77	84	150	29	106	3.90
47	L80047MM	78	84	150	30	106	4.26
48	L80048MM	79	84	150	30	105	4.18
50	L80050MM	81	84	150	32	106	3.90
52	L80052MM	83	84	150	33	106	3.90
55	L80055MM	86	86	150	35	106	4.10
56	L80056MM	87	86	150	35	108	4.18
57	L80057MM	90	86	150	36	108	4.40
58	L80058MM	92	86	150	37	108	4.70
60	L80060MM	94	86	150	39	106	4.70
63	L80063MM	97	86	150	41	108	4.94
64	L80064MM	97	86	150	41	108	4.86
65	L80065MM	99	86	150	41	106	4.90
70	L80070MM	105	86	170	45	126	6.40
75	L80075MM	112	86	170	47	126	6.90
80	L80080MM	119	86	170	51	126	7.60
85	L80085MM	125	86	180	54	135	9.40
90	L80090MM	131	86	180	58	135	10.00
95	L80095MM	141	102	190	61	143	12.10
100	L80100MM	146	102	190	46	143	12.60
105	L80105MM	151	102	190	66	143	13.20
110	L80110MM	157	102	200	70	152	14.50
115	L80115MM	163	102	200	72	152	15.10
120	L80120MM	170	102	200	77	150	16.00
125	L80125MM	175	102	200	77	136	17.12
130	L80130MM	180	102	210	80	145	18.59
135	L80135MM	186	102	210	80	144	19.50
140	L80140MM	192	102	210	80	142	20.80
145	L80145MM	198	102	210	80	141	21.47
150	L80150MM	203	102	210	85	139	22.33
155	L80155MM	209	102	210	85	138	23.35

※ナット対辺mmサイズソケット

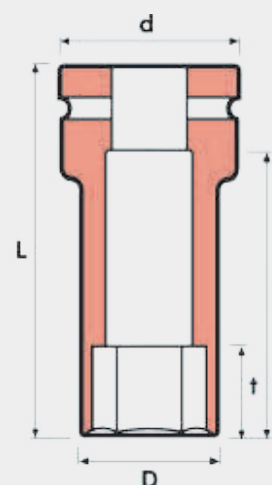


各部寸法

- d: 駆動端の直径
- D: ソケット先端の直径
- L: 全長
- t: ソケット開口部の深さ
- T: ボルトクリアランス深さ
- w: 対応ナット対辺

1-1/2 inch 差し込み角 6角ソケット (inchサイズ・ディープソケット)

対辺寸法W inch	パーツナンバー	D	d	L	t	T	重量
		mm	mm	mm	mm	mm	kg
1 3/16	L80103	56	84	150	17	108	3.30
1 3/8	L80106	61	84	150	20	108	3.79
1 1/2	L80108	65	84	150	24	108	3.86
1 5/8	L80110	70	84	150	27	106	3.70
1 11/16	L80111	73	84	150	27	102	3.90
1 3/4	L80112	75	84	150	29	102	3.70
1 13/16	L80113	77	84	150	29	102	3.90
1 7/8	L80114	78	84	150	30	102	3.80
1 15/16	L80115	80	84	150	31	102	3.90
2	L80200	82	84	150	32	102	3.90
2 1/16	L80201	83	84	150	33	102	3.90
2 1/8	L80202	84	84	150	35	102	4.00
2 3/16	L80203	87	86	150	35	102	4.20
2 1/4	L80204	90	86	150	36	102	4.40
2 5/16	L80205	92	86	150	37	102	4.60
2 3/8	L80206	94	86	150	39	102	4.80
2 7/16	L80207	96	86	150	40	102	4.80
2 1/2	L80208	97	86	150	41	102	4.90
2 9/16	L80209	99	86	150	41	102	4.90
2 5/8	L80210	102	86	170	43	126	6.10
2 11/16	L80211	104	86	170	43	126	6.30
2 3/4	L80212	105	86	170	45	126	6.40
2 13/16	L80213	107	86	170	46	126	6.60
2 7/8	L80214	110	86	170	46	126	6.80
2 15/16	L80215	112	86	170	47	126	6.90
3	L80300	116	86	170	48	126	7.60
3 1/16	L80301	118	86	170	49	126	7.60
3 1/8	L80302	119	86	170	51	126	7.60
3 3/16	L80303	121	86	180	51	135	9.00
3 1/4	L80304	123	86	180	52	135	9.20
3 3/8	L80306	125	86	180	54	135	9.40
3 7/16	L80307	129	86	180	55	127	9.31
3 1/2	L80308	130	86	180	58	135	9.90
3 5/8	L80310	136	102	180	58	135	10.300
3 3/4	L80312	141	102	190	61	143	12.100
3 13/16	L80313	142	102	190	61	136	12.420
3 7/8	L80314	144	102	190	64	143	12.400
4	L80400	148	102	190	64	143	12.800
4 1/16	L80401	149	102	190	66	133	13.060
4 1/8	L80402	151	102	190	66	143	13.200
4 3/16	L80403	153	102	190	67	143	13.600
4 1/4	L80404	155	102	200	70	150	14.700
4 5/16	L80405	157	102	200	70	141	14.78
4 3/8	L80406	158	102	200	70	141	14.88
4 1/2	L80408	163	102	200	72	150	15.10
4 5/8	L80410	166	102	200	77	150	15.80
4 3/4	L80412	170	102	200	77	138	16.14
4 7/8	L80414	173	102	200	77	137	17.84
5	L80500	178	102	210	77	146	18.93
5 1/8	L80502	180	102	210	80	145	18.86
5 3/16	L80503	182	102	210	80	145	19.09
5 1/4	L80504	185	102	210	80	144	19.66
5 3/8	L80506	188	102	210	80	143	20.34
5 1/2	L80508	192	102	210	80	142	20.61
5 3/4	L80512	199	102	210	85	140	21.42
5 7/8	L80514	203	102	210	85	140	22.33
6	L80600	206	102	210	85	139	22.99

※ナット対辺inchサイズソケット

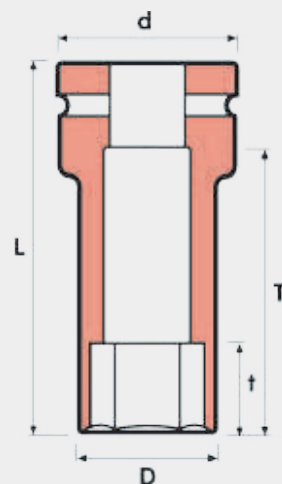


各部寸法

- d: 駆動端の直径
- D: ソケット先端の直径
- L: 全長
- t: ソケット開口部の深さ
- T: ボルトクリアランス深さ
- w: 対応ナット対辺

2-1/2 inch 差し込み角6角ソケット (mmサイズ・ディープソケット)

対辺寸法W mm	パーツナンバー	D	d	L	t	T	重量
		mm	mm	mm	mm	mm	kg
60	L250060MM	100	137	180	35	122	10.70
65	L250065MM	104	137	180	35	122	10.68
70	L250070MM	110	137	180	40	122	10.88
75	L250075MM	118	137	180	45	122	11.24
80	L250080MM	126	137	180	45	122	11.88
85	L250085MM	133	137	180	50	122	12.27
90	L250090MM	143	137	200	50	142	15.22
95	L250095MM	148	137	200	55	142	15.64
100	L250100MM	153	137	200	55	142	16.02
105	L250105MM	158	137	220	60	162	18.21
110	L250110MM	166	137	220	65	162	19.81
115	L250115MM	174	137	220	65	162	21.38
120	L250120MM	181	160	220	70	162	24.79
125	L250125MM	187	160	220	75	162	25.90
130	L250130MM	195	160	250	75	183	31.44
135	L250135MM	202	160	250	80	182	33.17
140	L250140MM	208	160	250	80	180	34.40
145	L250145MM	214	160	250	80	179	35.64
150	L250150MM	219	160	250	85	177	36.30
155	L250155MM	224	160	250	90	176	36.90
160	L250160MM	229	160	250	90	174	37.60
165	L250165MM	235	160	250	95	173	38.74
170	L250170MM	240	160	250	95	171	39.42

※ナット対辺mmサイズソケット

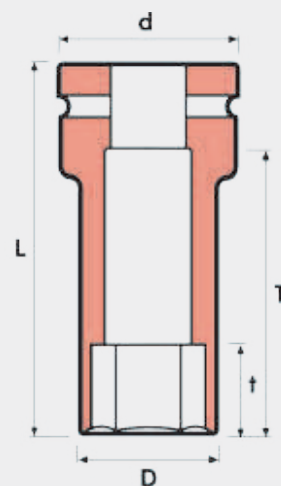


各部寸法

- d: 駆動端の直径
- D: ソケット先端の直径
- L: 全長
- t: ソケット開口部の深さ
- T: ボルトクリアランス深さ
- w: 対応ナット対辺

2-1/2 inch 差し込み角 6角ソケット (inchサイズ・ディープソケット)

対辺寸法W inch	パーツナンバー	D	d	L	t	T	重量
		mm	mm	mm	mm	mm	kg
2 3/8	L25206	100	137	180	35	122	10.7
2 7/16	L25207	102	137	180	35	122	10.73
2 1/2	L25208	102	137	180	35	122	10.64
2 9/16	L25209	104	137	180	35	122	10.68
2 5/8	L25210	106	137	180	40	122	10.7
2 11/16	L25211	108	137	180	40	122	10.83
2 3/4	L25212	110	137	180	40	122	10.88
2 13/16	L25213	112	137	180	45	122	11.00
2 7/8	L25214	116	137	180	45	122	11.36
2 15/16	L25215	118	137	180	45	122	11.24
3	L25300	120	137	180	45	122	11.51
3 1/16	L25301	122	137	180	45	122	11.68
3 1/8	L25302	126	137	180	45	122	11.88
3 1/4	L25304	128	137	180	50	122	11.9
3 3/8	L25306	133	137	180	50	122	12.27
3 1/2	L25308	142	137	200	50	142	15.12
3 5/8	L25310	145	137	200	55	142	15.39
3 3/4	L25312	148	137	200	55	142	15.64
3 7/8	L25314	151	137	200	55	142	15.96
4	L25400	155	137	200	60	142	16.31
4 1/8	L25402	158	137	220	60	162	18.21
4 3/16	L25403	160	137	220	65	162	18.7
4 1/4	L25404	163	137	220	65	162	19.24
4 3/8	L25406	167	137	220	65	162	19.9
4 1/2	L25408	172	137	220	65	162	20.92
4 5/8	L25410	178	160	220	70	162	24.28
4 3/4	L25412	181	160	220	70	162	24.79
4 7/8	L25414	186	160	220	75	162	25.77
5	L25500	190	160	250	75	184	30.19
5 1/8	L25502	195	160	250	75	183	31.44
5 3/16	L25503	198	160	250	80	183	32.25
5 1/4	L25504	200	160	250	80	182	32.88
5 3/8	L25506	204	160	250	80	181	33.47
5 1/2	L25508	208	160	250	80	180	34.4
5 3/4	L25512	216	160	250	85	178	36.00
5 7/8	L25514	219	160	250	85	178	36.3
6	L25600	221	160	250	85	177	36.68
6 1/8	L25602	224	160	250	90	176	36.90
6 1/4	L25604	228	160	250	90	175	38.30
6 3/8	L25606	232	160	250	90	174	38.74
6 1/2	L25608	235	160	250	95	173	38.74
6 3/4	L25612	243	160	250	95	171	41.37
6 7/8	L25614	247	160	250	95	170	42.44
7	L25700	250	160	250	95	170	42.94

※ナット対辺inchサイズソケット

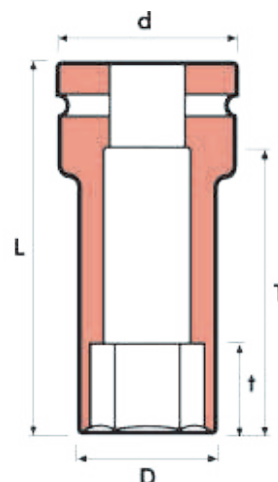

各部寸法

- d: 駆動端の直径
- D: ソケット先端の直径
- L: 全長
- t: ソケット開口部の深さ
- T: ボルトクリアランス深さ
- w: 対応ナット対辺